


LIQUID LEVEL MONITORING RELAY FOR THREE LEVELS - 3LLMR

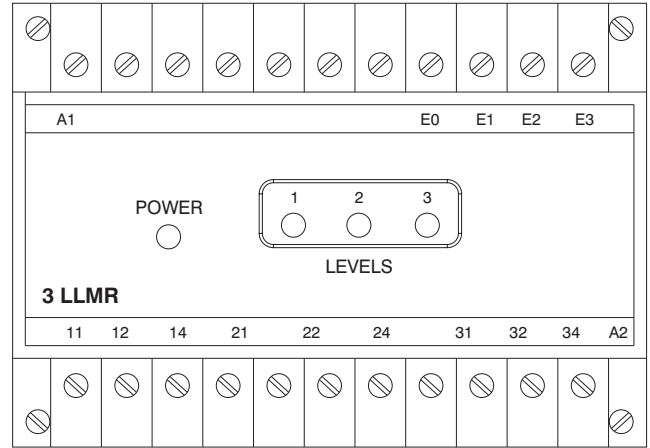

FEATURES

- Controller for conductivity type level switch
- DIN Rail mounted

SPECIFICATIONS :

Supply Voltage	: -110V AC +/-20% 50HZ
Power Consumption	: 3VA
Sensor Type	: Conductive Probes
Sensitivity	: 50 K Ohms
Output	: 3 Relay contacts 1C/O type rated 7A@250V AC

CONNECTION DETAILS :

A1, A2 : Supply Voltage

DIMENSION DETAILS :

Length - L	: 100mm
Breadth - B	: 70mm
Height - H	: 112mm

INPUTS :

E0 - Common Probe
E1, E2, E3 - 3 Level sensing probes

OUTPUT :

11 - COM	} Level relay contact corresponding to E1
12 - NC	
14 - NO	
21 - COM	} Level relay contact corresponding to E2
22 - NC	
24 - NO	
31 - COM	} Corresponding to E3 Level relay contact
32 - NC	
34 - NO	

SHRIDHAN AUTOMATION PVT. LTD.,

#B-54, KSSIDC Industrial Estate, Kumbalagodu, Mysore Road, Bengaluru - 560074

Ph. : 080 - 28437847 / 28437848 ; Fax : 080 - 28437849 ; Email : info@shridhan.com ; Website : www.shridhan.com