




This document is the exclusive property of SHRIDHAN INDIA and contains confidential information. This document or its contents shall not be used, reproduced or disclosed in whole or in part, without prior written permission of SHRIDHAN INDIA. This document and all its copies shall be returned to SHRIDHAN INDIA on demand.

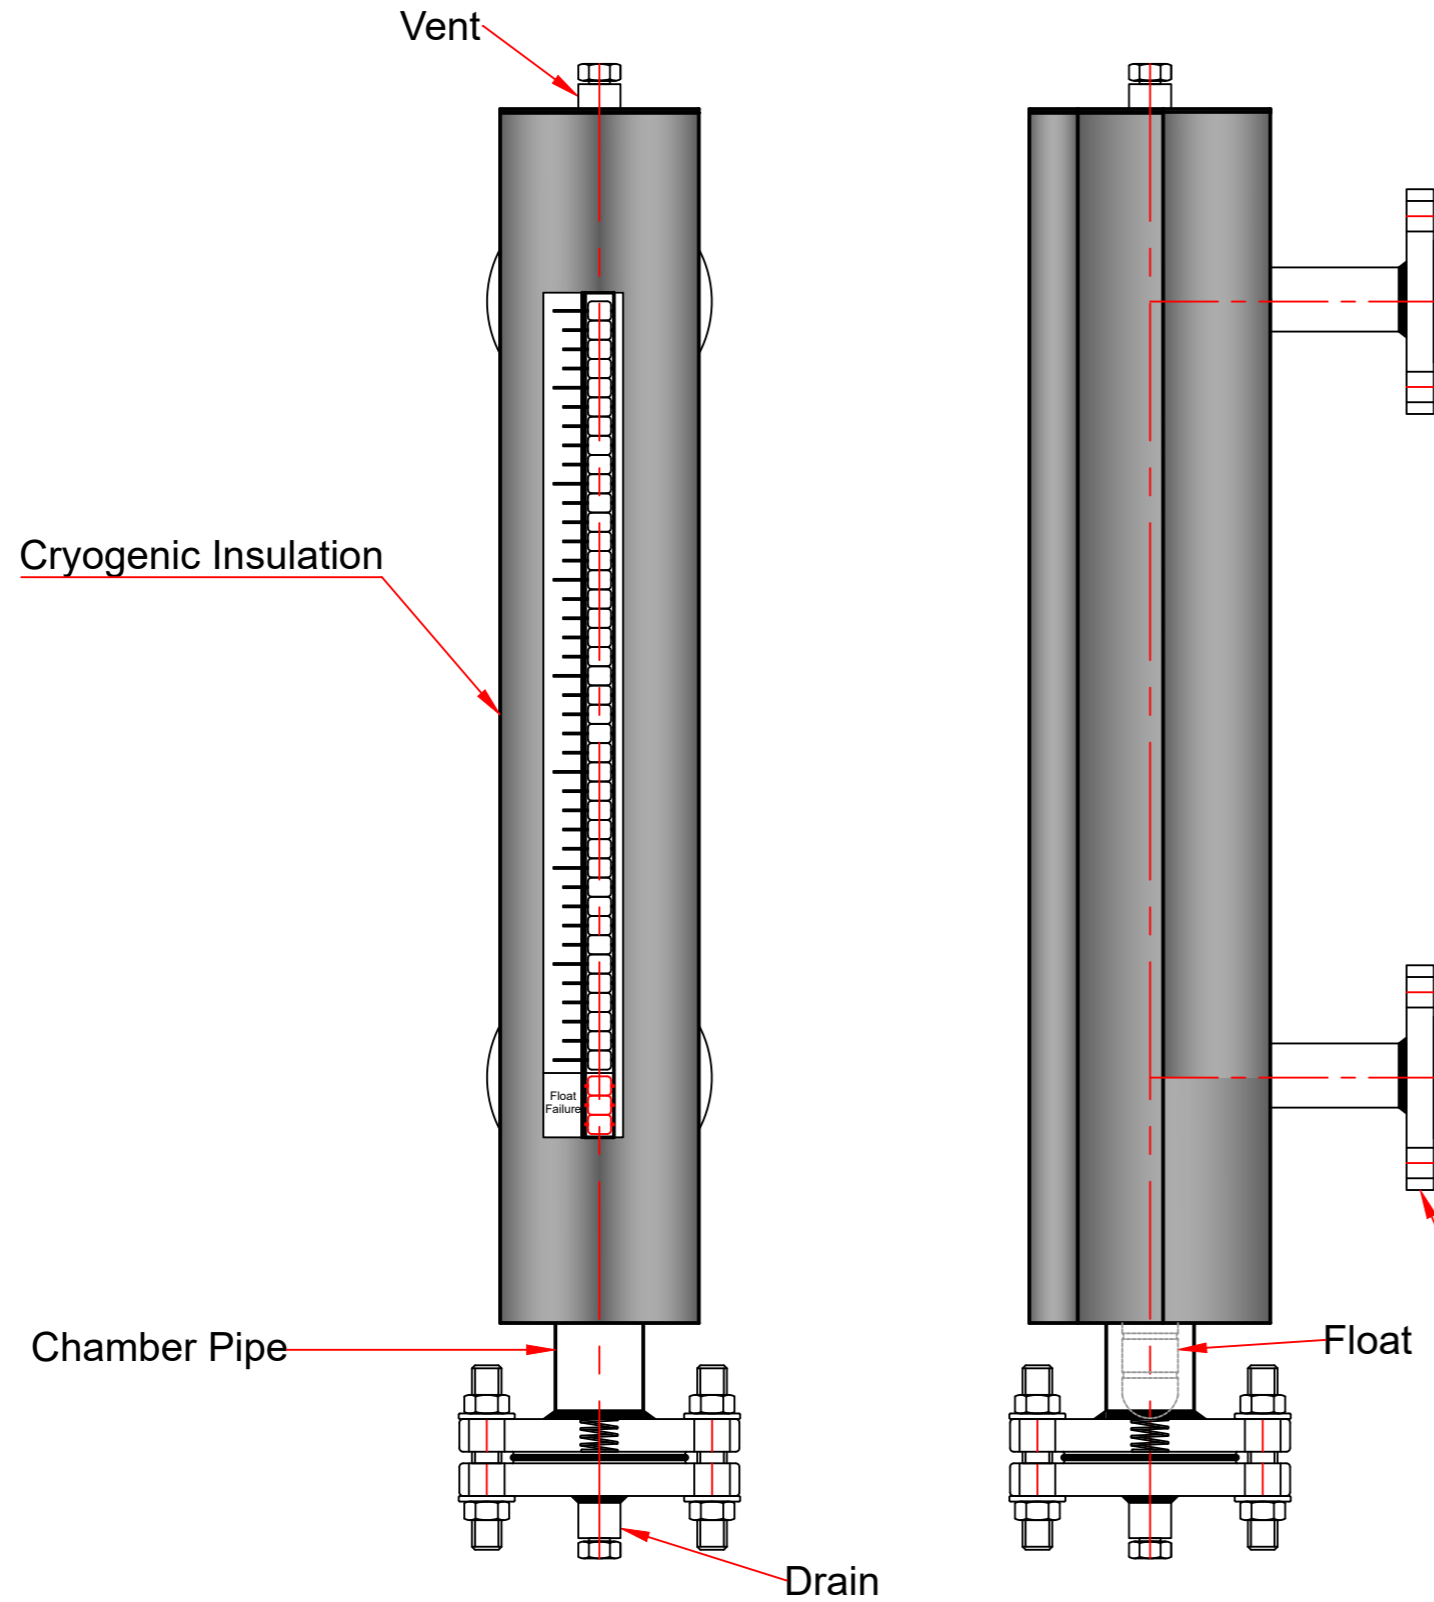

| Material of Construction | | Process Connection Flanged | | Process Connection Threaded | | |
|--------------------------|-----------------------------|----------------------------|------------------------|---|----------|--------------|
| SI No. | Material Type | SI No. | Type | SI No. | Type | |
| 1 | SS 304 | 1 | 1/2" (#150 to #2500) | 1 | 1/2" NPT | |
| 2 | SS 316 | 2 | 3/4" (#150 to #2500) | 2 | 1/2" BSP | |
| 3 | SS 316L | 3 | 1" (#150 to #2500) | 3 | 3/4" NPT | |
| 4 | SS 316/316L(Dual Certified) | 4 | 1 1/2" (#150 to #2500) | 4 | 3/4" BSP | |
| 5 | Titanium | 5 | 2" (#150 to #2500) | 5 | 1" NPT | |
| 6 | Hastelloy C276 | 6 | 3" (#150 to #2500) | 6 | 1" BSP | |
| 7 | Inconel 625 | Vent/Drain Flanged | | Vent/Drain Plugged | | |
| 8 | Inconel 825 | SI No. | Type | SI No. | Size | Type |
| 9 | PVDF / Kynar | 1 | 1/2" (#150 to #2500) | 1 | 1/2" | BSP/NPT Plug |
| 10 | PP | 2 | 3/4" (#150 to #2500) | 2 | 3/4" | BSP/NPT Plug |
| | | 3 | 1" (#150 to #2500) | 3 | 1" | BSP/NPT Plug |
| | | 4 | 1 1/2" (#150 to #2500) | 4 | 1 1/2" | BSP/NPT Plug |
| | | 5 | 2" (#150 to #2500) | 5 | 2" | BSP/NPT Plug |
| | | Chamber Pipe | | Vent/Drain Valve | | |
| SI No. | Size | SI No. | Size | Type | | |
| 1 | 2"(Sch.10 to Sch.160) | 1 | 1/2" | Threaded,SW,SW with Flange, Flanged Valve | | |
| 2 | 2 1/2"(Sch.10 to Sch.160) | 2 | 3/4" | Threaded,SW,SW with Flange, Flanged Valve | | |
| 3 | 3"(Sch.10 to Sch.160) | 3 | 1" | Threaded,SW,SW with Flange, Flanged Valve | | |
| 4 | 4"(Sch.10 to Sch.160) | 4 | 1 1/2" | Threaded,SW,SW with Flange, Flanged Valve | | |
| | | 5 | 2" | Threaded,SW,SW with Flange, Flanged Valve | | |

NOTE:
For any other variants contact factory.

Product Approvals:
 1. ATEX Approved.
 2. PED Approved.

| | | | |
|-----------------|---|--|--|
| Customer Name : |  | | |
| End User: | | | |
| Drawing No. : | Rev No. : 00 | Projection :  | |
| Cust Ref : | All Dimensions in mm | | |
| SO No. : | Title & Model No. Magnetic Level Indicator with Cryogenic Insulation | | |
| Scale : NTS | Sheet 1 of 1 | | |

| Project: | R0 | Description | Date | Drawn | Checked | Approved |
|----------|-----|-------------|------|-------|---------|----------|
| | Rev | | | | | |